




TITAN FLOW CONTROL, INC.

TECHNICAL AND PERFORMANCE DATA

PRESSURE DROP CHARTS ♦ WYE & BASKET STRAINERS

WYE Strainers - Small Models


Models: YS12 - YS52 - YS55 - YS56 - YS81 - YS82

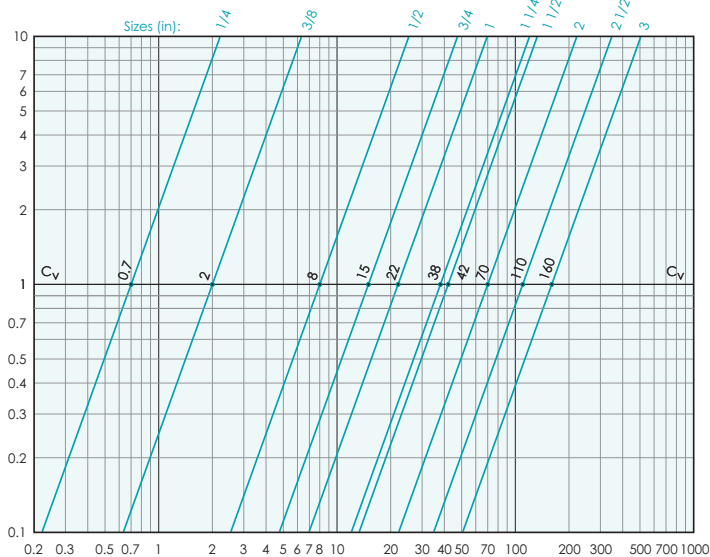

Legend: Pressure Drop - PSI (y - axis) versus Flow Rate - GPM (x - axis)

WYE Strainers - Large Models


Models: YS58 - YS59 - YS54 - YS61 - YS62 - YS63 - YS64 - YS65

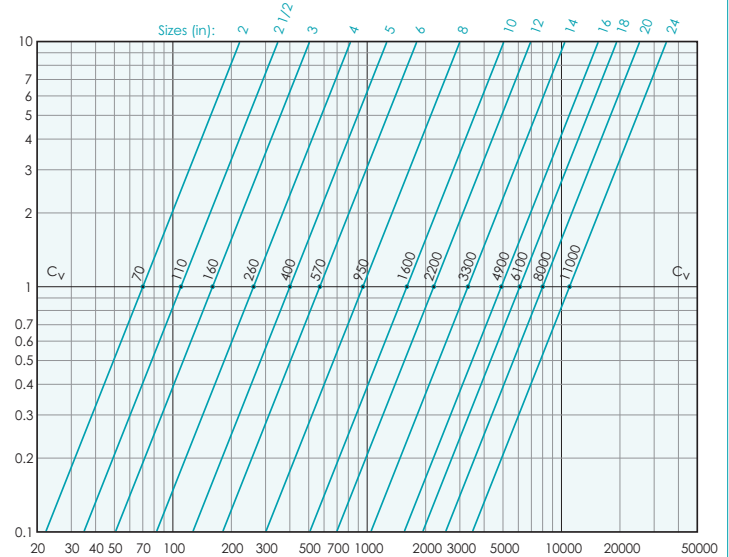

Legend: Pressure Drop - PSI (y - axis) versus Flow Rate - GPM (x - axis)

WYE Strainers - High Pressure - Class 900 & 1500


Models: YS66 - YS67 - YS68 - YS69 - YS83 - YS84

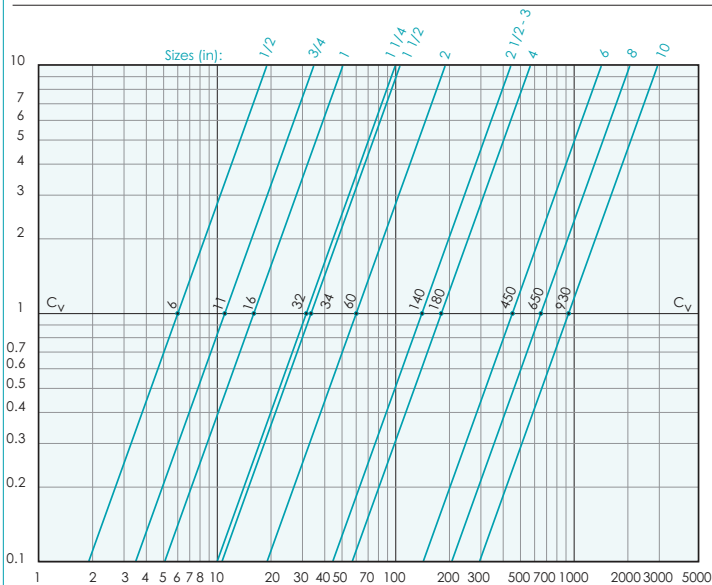

Legend: Pressure Drop - PSI (y - axis) versus Flow Rate - GPM (x - axis)

WYE Strainers - High Pressure - Class 2500

Models: YS70 - YS71 - YS85 - YS86

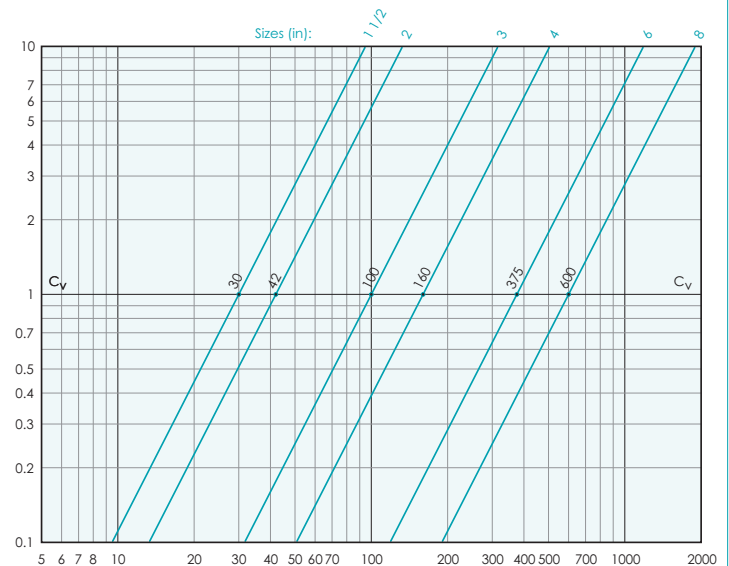

Legend: Pressure Drop - PSI (y - axis) versus Flow Rate - GPM (x - axis)

Pressure Drop Equation for Liquids:

$$\Delta P = G \times (Q / C_v)^2 \times C_r$$

ΔP = Pressure drop (psi)
 C_v = Flow coefficient factor

G = Specific gravity of liquid
 Q = Flow rate (GPM)
 C_r = Correction factor for mesh and viscosity

- These curves are theoretical; actual results may vary depending on installation conditions and other variables. Use these values for reference only.
- The above pressure drop charts are based upon 1/8" perforated screens and baskets handling clean water at 60 °F during ideal inlet and outlet conditions. Therefore, they should only be used for estimation purposes.
- For fluids other than water, multiply the pressure drop (ΔP) obtained from the charts by the specific gravity of the fluid in question.
- For mesh lined screens, multiply the pressure drop (ΔP) obtained from the charts by the corresponding correction factor shown in the C_v correction table.

TITAN FLOW CONTROL, INC.

Tel: 910-735-0000 ♦ Fax: 910-738-3848 ♦ titan@titanfci.com ♦ www.titanfci.com
 290 Corporate Drive ♦ PO Box 7408 ♦ Lumberton, NC 28358




TITAN FLOW CONTROL, INC.

TECHNICAL AND PERFORMANCE DATA

PRESSURE DROP CHARTS ♦ WYE & BASKET STRAINERS

Basket Strainers - Threaded Ends & Flanged Ends


Models: BS25 - BS25F - BS35 - BS35F

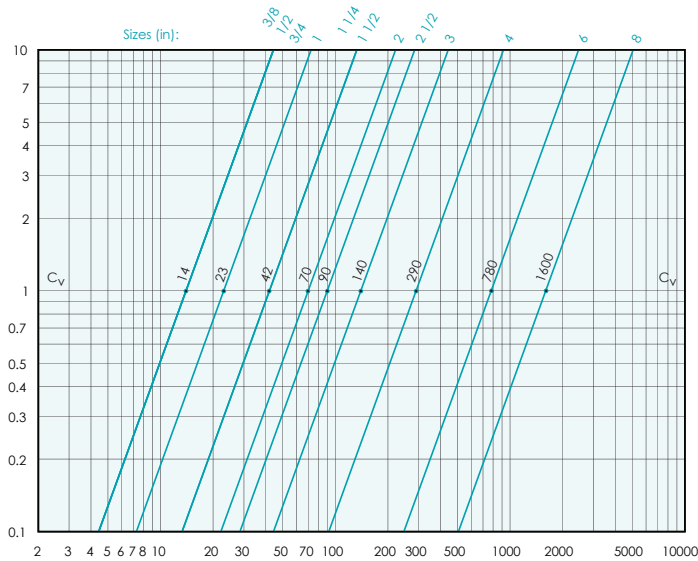

Legend: Pressure Drop - PSI (y - axis) versus Flow Rate - GPM (x - axis)

Basket Strainers - Flanged Ends

Models: BS55 - BS65 - BS85 - BS86 - BS95 - BS89

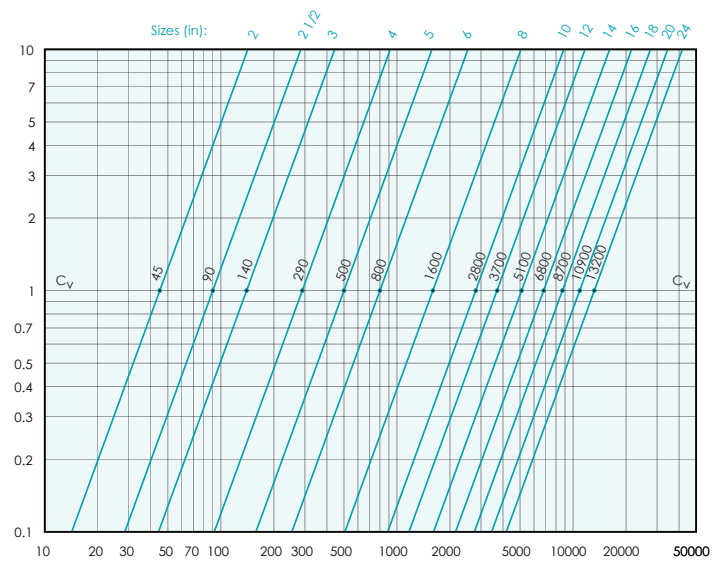

Legend: Pressure Drop - PSI (y - axis) versus Flow Rate - GPM (x - axis)

Cv CORRECTION FACTOR TABLE

| Centistokes | (SSU) | Perf. (Unlined) | 20 MESH | 40 MESH | 60 MESH | 80 MESH | 100 MESH | 120 MESH | 150 MESH | 200 MESH | 300 MESH | 25 Micron | 10 Micron | 5 Micron |
|-------------|------------|-----------------|---------|---------|---------|---------|----------|----------|----------|----------|----------|-----------|-----------|----------|
| 2 | 30 (Water) | 1.00 | 1.05 | 1.2 | 1.4 | 1.6 | 1.7 | 1.8 | 2.0 | 2.2 | 2.35 | 3.0 | 3.5 | 4.0 |
| 10 | 60 | 1.1 | 1.15 | 1.4 | 1.5 | 1.7 | 1.8 | 2.2 | 2.3 | 2.4 | 2.55 | --- | --- | --- |
| 20 | 100 | 1.2 | 1.25 | 1.5 | 1.6 | 1.9 | 2.1 | 2.35 | 2.45 | 2.6 | 2.75 | --- | --- | --- |
| 32 | 150 | 1.3 | 1.35 | 1.6 | 1.7 | 2 | 2.2 | 2.45 | 2.85 | 3 | 3.15 | --- | 4.0 | --- |
| 43 | 200 | 1.4 | 1.45 | 1.7 | 1.8 | 2.1 | 2.3 | 2.55 | 3.0 | 3.2 | 3.35 | 4.0 | --- | --- |
| 54 | 250 | 1.45 | 1.5 | 1.75 | 1.85 | 2.2 | 2.35 | 2.65 | 3.1 | 3.3 | 3.4 | --- | --- | --- |
| 76 | 350 | 1.5 | 1.6 | 1.8 | 1.9 | 2.3 | 2.45 | 2.75 | 3.2 | 3.4 | 3.5 | --- | --- | --- |
| 100 | 500 | 1.6 | 1.7 | 1.9 | 2.1 | 2.4 | 2.6 | 2.8 | 3.35 | 3.6 | 3.75 | --- | --- | --- |
| 162 | 750 | 1.65 | 1.9 | 2.1 | 2.3 | 2.5 | 2.7 | 2.9 | 3.5 | 3.7 | 3.9 | --- | --- | --- |
| 216 | 1000 | 1.7 | 2.0 | 2.2 | 2.4 | 2.6 | 2.8 | 3.0 | 3.6 | 3.8 | 4.0 | --- | --- | --- |
| 325 | 1500 | 1.8 | 2.1 | 2.3 | 2.6 | 2.75 | 3 | 3.2 | 3.8 | 4.1 | 4.3 | --- | --- | --- |
| 433 | 2000 | 1.9 | 2.2 | 2.4 | 2.7 | 2.9 | 3.2 | 3.4 | 4.05 | 4.6 | 5.5 | --- | --- | --- |
| 650 | 3000 | 2.0 | 2.3 | 2.6 | 2.9 | 3.5 | 3.5 | 3.8 | 4.6 | 5.0 | 5.2 | --- | --- | --- |
| 866 | 4000 | 2.1 | 2.45 | 2.8 | 3.15 | 3.6 | 3.9 | 4.2 | 4.9 | --- | --- | --- | --- | --- |
| 1083 | 5000 | 2.2 | 2.6 | 3 | 3.4 | 3.8 | 4.2 | 4.6 | --- | --- | --- | --- | --- | --- |
| 1624 | 7500 | 2.35 | 2.8 | 3.4 | 3.8 | 4.3 | 4.75 | --- | --- | --- | --- | --- | --- | --- |
| 2200 | 10000 | 2.5 | 3.0 | 3.5 | 4.0 | 4.5 | 5.0 | --- | --- | --- | --- | --- | --- | --- |
| 3000 | 13500 | 3.0 | 3.5 | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 5000 | 22500 | 4.0 | 4.5 | 5.0 | 5.5 | 6.0 | 6.5 | 7.5 | 8.0 | 8.5 | 9.0 | 9.5 | 10.0 | 10.5 |
| 6000 | 27300 | 4.2 | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 15000 | 67000 | 6.0 | 6.5 | 7.0 | 7.5 | 8.0 | 8.5 | 9.0 | 9.5 | 10.0 | 10.5 | 11.0 | 11.5 | 12.0 |
| 18900 | 86000 | 8.0 | 8.5 | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 20000 | 89300 | 8.5 | 9.0 | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |

Multiply the Correction Factor by the pressure drop obtained from the charts in order to calculate ΔP for other liquids (besides water) and mesh lined screens and baskets.

Pressure Drop Equation for Liquids:

$$\Delta P = G \times (Q / C_v)^2 \times C_r$$

 ΔP = Pressure drop (psi) C_v = Flow coefficient factor

G = Specific gravity of liquid

 C_r = Correction factor for mesh and viscosity

Q = Flow rate (GPM)

- These curves are theoretical; actual results may vary depending on installation conditions and other variables. Use these values for reference only.
- The above pressure drop charts are based upon 1/8" perforated screens and baskets handling clean water at 60 °F during ideal inlet and outlet conditions. Therefore, they should only be used for estimation purposes.
- For fluids other than water, multiply the pressure drop (ΔP) obtained from the charts by the specific gravity of the fluid in question.
- For mesh lined screens, multiply the pressure drop (ΔP) obtained from the charts by the corresponding correction factor shown in the Cv correction table.

TITAN FLOW CONTROL, INC.

Tel: 910-735-0000 ♦ Fax: 910-738-3848 ♦ titan@titanfci.com ♦ www.titanfci.com
290 Corporate Drive ♦ PO Box 7408 ♦ Lumberton, NC 28358