




TITAN FLOW CONTROL, INC.

TECHNICAL AND PERFORMANCE DATA

PRESSURE DROP CHARTS ♦ WYE & BASKET STRAINERS

WYE Strainers - Small Models


Models: YS12 - YS52 - YS55 - YS56 - YS81 - YS82

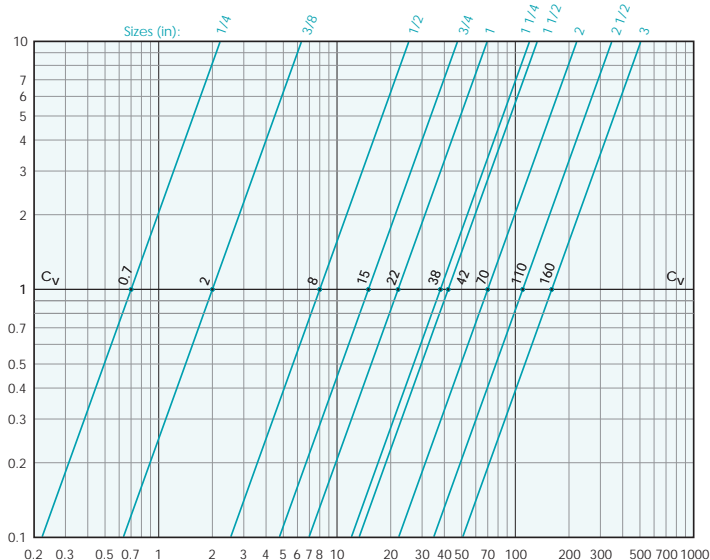

Legend: Pressure Drop - PSI (y - axis) versus Flow Rate - GPM (x -axis)

WYE Strainers - Large Models


Models: YS58 - YS59 - YS54 - YS61 - YS62 - YS63 - YS64 - YS65

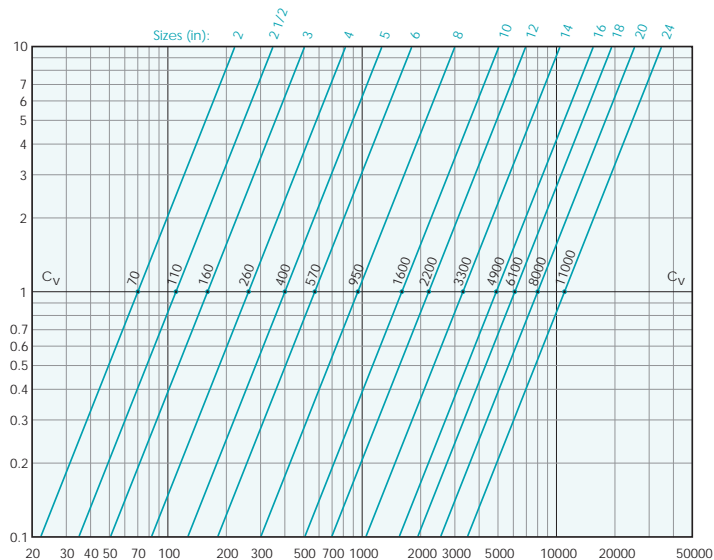

Legend: Pressure Drop - PSI (y - axis) versus Flow Rate - GPM (x -axis)

WYE Strainers - High Pressure - Class 900 & 1500


Models: YS66 - YS67 - YS68 - YS69 - YS83 - YS84

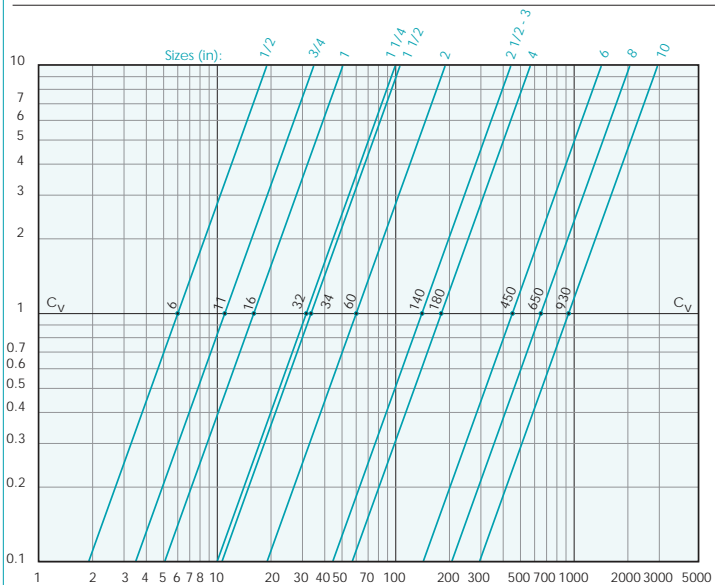

Legend: Pressure Drop - PSI (y - axis) versus Flow Rate - GPM (x -axis)

WYE Strainers - High Pressure - Class 2500

Models: YS70 - YS71 - YS85 - YS86

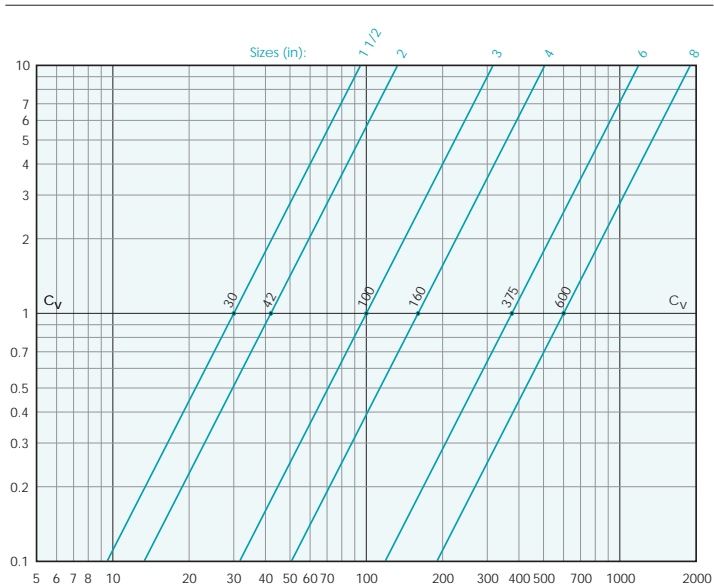

Legend: Pressure Drop - PSI (y - axis) versus Flow Rate - GPM (x -axis)

Pressure Drop Equation for Liquids:

$$\Delta P = G \times (Q / Cv)^2 \times Cr$$

ΔP = Pressure drop (psi)
 Cv = Flow coefficient factor

G = Specific gravity of liquid
 Cr = Correction factor for mesh and viscosity
 Q = Flow rate (GPM)

- These curves are theoretical; actual results may vary depending on installation conditions and other variables. Use these values for reference only.
- The above pressure drop charts are based upon 1/8" perforated screens and baskets handling clean water at 60 °F during ideal inlet and outlet conditions. Therefore, they should only be used for estimation purposes.
- For fluids other than water, multiply the pressure drop (ΔP) obtained from the charts by the specific gravity of the fluid in question.
- For mesh lined screens, multiply the pressure drop (ΔP) obtained from the charts by the corresponding correction factor shown in the Cv correction table.

TITAN FLOW CONTROL, INC.

Tel: 910-735-0000 ♦ Fax: 910-738-3848 ♦ titan@titanfci.com ♦ www.titanfci.com
 290 Corporate Drive ♦ PO Box 7408 ♦ Lumberton, NC 28358




TITAN FLOW CONTROL, INC.

TECHNICAL AND PERFORMANCE DATA

PRESSURE DROP CHARTS ♦ WYE & BASKET STRAINERS

Basket Strainers - Threaded Ends & Flanged Ends


Models: BS25 - BS25F - BS35 - BS35F

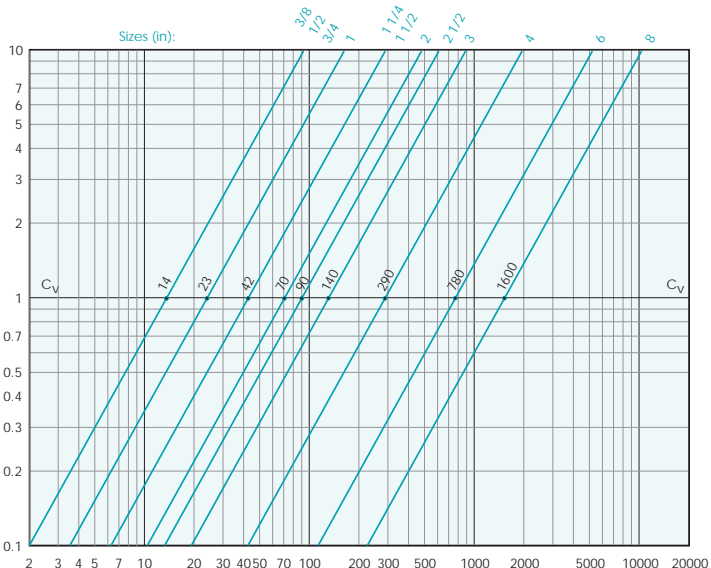

Legend: Pressure Drop - PSI (y - axis) versus Flow Rate - GPM (x - axis)

Basket Strainers - Flanged Ends

Models: BS55 - BS65 - BS85 - BS86 - BS95

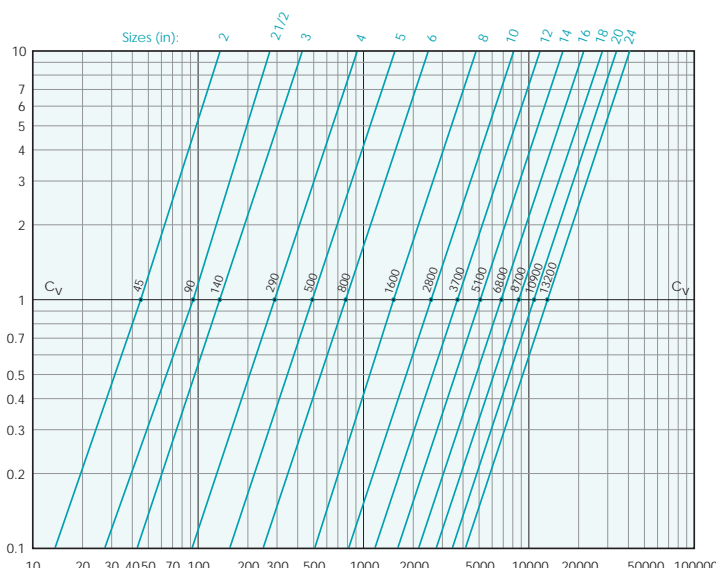

Legend: Pressure Drop - PSI (y - axis) versus Flow Rate - GPM (x - axis)

Cv CORRECTION FACTOR TABLE

| Centistokes | (SSU) | Perf. (Unlined) | 20 MESH | 40 MESH | 60 MESH | 80 MESH | 100 MESH | 120 MESH | 150 MESH | 200 MESH | 300 MESH | 25 Micron | 10 Micron | 5 Micron |
|-------------|------------|-----------------|---------|---------|---------|---------|----------|----------|----------|----------|----------|-----------|-----------|----------|
| 2 | 30 (Water) | 1.00 | 1.05 | 1.2 | 1.4 | 1.6 | 1.7 | 1.8 | 2.0 | 2.2 | 2.35 | 3.0 | 3.5 | 4.0 |
| 10 | 60 | 1.1 | 1.15 | 1.4 | 1.5 | 1.7 | 1.8 | 2.2 | 2.3 | 2.4 | 2.55 | --- | --- | --- |
| 20 | 100 | 1.2 | 1.25 | 1.5 | 1.6 | 1.9 | 2.1 | 2.35 | 2.45 | 2.6 | 2.75 | --- | --- | --- |
| 32 | 150 | 1.3 | 1.35 | 1.6 | 1.7 | 2 | 2.2 | 2.45 | 2.85 | 3 | 3.15 | --- | 4.0 | --- |
| 43 | 200 | 1.4 | 1.45 | 1.7 | 1.8 | 2.1 | 2.3 | 2.55 | 3.0 | 3.2 | 3.35 | 4.0 | --- | --- |
| 54 | 250 | 1.45 | 1.5 | 1.75 | 1.85 | 2.2 | 2.35 | 2.65 | 3.1 | 3.3 | 3.4 | --- | --- | --- |
| 76 | 350 | 1.5 | 1.6 | 1.8 | 1.9 | 2.3 | 2.45 | 2.75 | 3.2 | 3.4 | 3.5 | --- | --- | --- |
| 100 | 500 | 1.6 | 1.7 | 1.9 | 2.1 | 2.4 | 2.6 | 2.8 | 3.35 | 3.6 | 3.75 | --- | --- | --- |
| 162 | 750 | 1.65 | 1.9 | 2.1 | 2.3 | 2.5 | 2.7 | 2.9 | 3.5 | 3.7 | 3.9 | --- | --- | --- |
| 216 | 1000 | 1.7 | 2.0 | 2.2 | 2.4 | 2.6 | 2.8 | 3.0 | 3.6 | 3.8 | 4.0 | --- | --- | --- |
| 325 | 1500 | 1.8 | 2.1 | 2.3 | 2.6 | 2.75 | 3 | 3.2 | 3.8 | 4.1 | 4.3 | --- | --- | --- |
| 433 | 2000 | 1.9 | 2.2 | 2.4 | 2.7 | 2.9 | 3.2 | 3.4 | 4.05 | 4.6 | 5.5 | --- | --- | --- |
| 650 | 3000 | 2.0 | 2.3 | 2.6 | 2.9 | 3.5 | 3.5 | 3.8 | 4.6 | 5.0 | 5.2 | --- | --- | --- |
| 866 | 4000 | 2.1 | 2.45 | 2.8 | 3.15 | 3.6 | 3.9 | 4.2 | 4.9 | --- | --- | --- | --- | --- |
| 1083 | 5000 | 2.2 | 2.6 | 3 | 3.4 | 3.8 | 4.2 | 4.6 | --- | --- | --- | --- | --- | --- |
| 1624 | 7500 | 2.35 | 2.8 | 3.4 | 3.8 | 4.3 | 4.75 | --- | --- | --- | --- | --- | --- | --- |
| 2200 | 10000 | 2.5 | 3.0 | 3.5 | 4.0 | 4.5 | 5.0 | --- | --- | --- | --- | --- | --- | --- |
| 3000 | 13500 | 3.0 | 3.5 | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 5000 | 22500 | 4.0 | 4.5 | 5.0 | 5.5 | 6.0 | 6.5 | 7.5 | 8.0 | 8.5 | 9.0 | 9.5 | 10.0 | 10.5 |
| 6000 | 27300 | 4.2 | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 15000 | 67000 | 6.0 | 6.5 | 7.0 | 7.5 | 8.0 | 8.5 | 9.0 | 9.5 | 10.0 | 10.5 | 11.0 | 11.5 | 12.0 |
| 18900 | 86000 | 8.0 | 8.5 | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 20000 | 89300 | 8.5 | 9.0 | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |

Multiply the Correction Factor by the pressure drop obtained from the charts in order to calculate Δ P for other liquids (besides water) and mesh lined screens and baskets.

Pressure Drop Equation for Liquids:

$$\Delta P = G \times (Q / Cv)^2 \times Cr$$

Δ P = Pressure drop (psi)
Cv = Flow coefficient factor

G = Specific gravity of liquid
Q = Flow rate (GPM)
Cr = Correction factor for mesh and viscosity

- These curves are theoretical; actual results may vary depending on installation conditions and other variables. Use these values for reference only.
- The above pressure drop charts are based upon 1/8" perforated screens and baskets handling clean water at 60 °F during ideal inlet and outlet conditions. Therefore, they should only be used for estimation purposes.
- For fluids other than water, multiply the pressure drop (Δ P) obtained from the charts by the specific gravity of the fluid in question.
- For mesh lined screens, multiply the pressure drop (Δ P) obtained from the charts by the corresponding correction factor shown in the Cv correction table.

TITAN FLOW CONTROL, INC.

Tel: 910-735-0000 ♦ Fax: 910-738-3848 ♦ titan@titanfci.com ♦ www.titanfci.com
290 Corporate Drive ♦ PO Box 7408 ♦ Lumberton, NC 28358